

## Remarks

### *Summary*

Figures 1 and 2 have been amended to overcome the drawing objections, and the Abstract, the title, the disclosure, and Claims 11, 12, 29, and 30 have been amended to overcome formal objections thereto. Therefore, the application is now in allowable form.

### *Status of the claims*

Claims 1-39 are pending. Claims 1-39 have been amended to improve their form. Claims 11, 12, 29, and 30 have been amended to overcome formal objections thereto. Claims 1 and 18 are independent.

### *Requested action*

Applicants respectfully request the Examiner to reconsider and withdraw the outstanding objections in view of the foregoing amendments and the following remarks.

### *Drawing objections*

The Examiner objects to reference character "12" because it is allegedly used to denote both a fixing means or roller fixing device and sheet feed rollers. In response, while not

conceding the propriety of the objection, Figure 1 has been amended to change one of the occurrences of reference numeral "12" to --13--, and page 30, line 12 of the specification has been amended to change "12" to --13--, by filing the attached clean and marked-up copies of a substitute specification, to overcome the objection.

The Examiner also objects to reference character "d" because it is used to denote both the primary transfer nip portion in Figure 2 and the stroke or movement amount, as shown in Figures 3-5.<sup>1</sup> In response, while not conceding the propriety of the objection, Applicants have amended Figure 2 to change "d" to --z--, and Applicants have made a corresponding change at page 29, line 2 and page 33, line 24 of the specification, by filing the attached clean and marked-up copies of a substitute specification.

Corrected formal drawings of Figures 1 and 2 are also attached.

---

<sup>1</sup>The Office Action states that the primary transfer nip portion "d" is shown in Figure 1, but, since this element is shown only in Figure 2, Applicants assume that the Office Action is referring to Figure 2 with reference to this element. In addition, the Office Action states that the stroke or movement amount "d" is shown in Figure 31, but since this parameter is shown only in Figures 3-5, Applicants assume that the Office Action is referring to Figures 3-5 with reference to this element.

### *Specification objections*

The Examiner objects to the Abstract because of its length and its use of legal terminology. In addition, the Examiner objects to the title as not being descriptive of the claimed invention, and the Examiner objects to pages 18, 30, and 41 of the specification for minor informalities therein.

In response, while not conceding the propriety of the objections, the Abstract, the title, and pages 18, 30, and 41 of the specification have been amended by filing the attached clean and marked-up copies of a substitute specification to address the points raised by the Examiner, thereby obviating the objections.

### *Substitute specification*

Attached are clean and marked-up copies of a substitute specification, amending the title, the Abstract, and pages 18, 29, 30, 33, and 41 to overcome the objections noted above. In addition, the substitute specification makes additional changes to improve the form of the application.

### *Claim objections*

The Examiner objects to Claims 11, 12, 29, and 30 for minor informalities therein. In response, while not conceding the propriety of the objections, these claims have been amended to overcome the objections. In addition, Claims 1-39 have been amended to improve their form.

### *Statement of reasons for allowance*

Page 4 of the Office Action states that:

....the prior art of record does not teach or suggest an image forming apparatus satisfying the following condition:  $L1 + d \leq L2$ , wherein  $L1$  (mm) be a developing width,  $L2$  (mm) be a contact width of developer charging means, and  $d$  (mm) be a width of movement of the developer charging means in the direction substantially the same as the longitudinal direction of an image bearing member, in combination with the remaining claimed limitations.

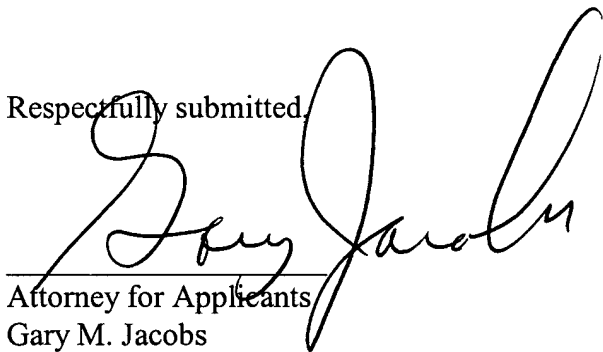
But, Applicants submit that Claim 1 does not relate to an image forming apparatus, and further that as amended Claim 1 and amended Claim 18 no longer recite developer charging means. Nevertheless, independent Claims 1 and 18 and their dependent claims are allowable for the unique combination of features recited therein.

*Conclusion*

In view of the above amendments and remarks, the application is now in allowable form. Therefore, early passage to issue is respectfully solicited.

Applicants' undersigned attorney may be reached in our Washington, D.C. office by telephone at (202) 530-1010. All correspondence should continue to be directed to our address given below.

Respectfully submitted,

A handwritten signature in black ink, appearing to read "Gary Jacobs", written over a horizontal line.

Attorney for Applicants  
Gary M. Jacobs  
Registration No. 28,861

FITZPATRICK, CELLA, HARPER & SCINTO  
30 Rockefeller Plaza  
New York, New York 10112-3800  
Facsimile: (212) 218-2200

GMJ/llp

DC\_MAIN 185603v1

IN THE DRAWINGS:

In Figure 1:

Change the rightmost occurrence of reference numeral "12", which is positioned to the right of reference numeral 10, to --13--.

In Figure 2:

Change reference letter "d" to --z--.



5     (performing a transferring process) for transferring the toner image from the surface of the  
 photosensitive member onto a transferring material such as a paper sheet, a cleaning apparatus  
 (performing a cleaning process) for removing developer (referred to as residual toner or transfer  
 residual toner) remaining more or less on the photosensitive member after the transferring  
 process so as to clean the surface of the photosensitive member, and a fixing apparatus  
 10    (performing a fixing process) for fixing the toner image on the transferring material. The  
 electrophotography process (including charging, exposure, development, transferring, and  
 cleaning) is repeatedly performed on the photosensitive member for image formation.

Generally, in the cleaning apparatus, there is provided a waste toner recovering container  
 for accommodating the transfer residual toner that has been removed from the surface of the  
 15    photosensitive member. Therefore, in order to provide an image forming apparatus with a long  
 operating life, it is necessary to design this container to be large. This is not desirable from the  
 viewpoint of downsizing of the apparatus.

In view of the above, there has been developed is a cleanerless ~~cleaner-less~~ image  
 forming apparatus that does not have a cleaning apparatus including a waste toner recovering  
 20    container, in which the transfer residual toner remaining on the photosensitive member after the  
 transferring process is removed and recovered from the surface of the photosensitive member in  
 the developing apparatus by “cleaning simultaneous with developing”.

The ~~cleaning-simultaneous-with-developing~~ cleaning-simultaneous-with-developing  
process is a process performed during the developing process in the next or succeeding process,  
 25    namely during the process for developing an electrostatic image after the photosensitive member  
 is successively charged and the electrostatic image is formed by exposure, to recover transfer



5 residual toner remaining on the photosensitive member after transferring. In that process, the transfer residual toner that is present on the area of the surface of the photosensitive member that should not be developed is recovered into the developing apparatus by application of a fog removing bias (i.e. a fog removing potential  $V_{\text{back}}$  defined as an ~~electric~~ electrical potential difference between the DC voltage applied to the developing apparatus and the surface potential  
10 of the photosensitive member).

With this process, the transfer residual toner is recovered or collected by the developing apparatus and reused for development of electrostatic latent images in the succeeding processes. Consequently, waste toner can be eliminated and the effort for maintenance of the apparatus can be reduced. In addition, its ~~cleaner-less~~ cleanerless structure is advantageous for downsizing of  
15 the image forming apparatus.

Referring to the charging device, recently, a ~~roller-charging-type~~ roller-charging-type charger that utilizes a charging roller functioning as a contact charging member have been preferably used in place of a corona charger. The ~~roller-charging-type~~ roller-charging-type charger is preferable for its stability in charging. In the ~~roller-charging~~ roller-charging process,  
20 an elastic roller (i.e. a charging roller) having ~~electro-conductive~~ electroconductive properties is brought into pressure contact with a member to be charged and charging of the member to be charged is performed by application of a voltage to the roller.

As to this charging process, there has been proposed and put into practice, for example in Japanese Patent Application Laid-Open No. H63-149669, an AC charging process, in which a  
25 voltage consisting of a DC voltage equal to a desired surface potential  $V_d$  of the member to be charged and an AV voltage having a peak-to-peak voltage equal to or more than  $2 \times V_{\text{th}}$  ( $V_{\text{th}}$  is a

5 discharge-start voltage or a breakdown or threshold voltage) superimposed on the DC voltage is applied to a contact charging member. With a the voltage averaging effect of the AC voltage, the degree of uniformity in the charge can be improved as compared to the DC charging process, so that the ~~electric~~ electrical potential of the member to be charged is substantially converged to  $V_d$ , that is the center of the peaks of the AC voltage.

10 In the case that the aforementioned contact charging apparatus is used as the charging apparatus for the photosensitive member in the ~~cleaner-less~~ cleanerless image forming apparatus in which transfer residual toner remaining on the photosensitive member after the transferring process is removed and recovered by the leaning simultaneous with developing when the transfer residual toner passes through a charging portion in the form of a ~~contact nip~~ contact-nip  
 15 portion between the photosensitive member and the contact charging apparatus, transfer residual toner, especially reversely charged toner that has a charge polarity reverse to the normal polarity, can adhere to the contact charging apparatus to bring about toner contamination of the contact charging apparatus beyond an acceptable degree, so that a charging error might be caused.

This is because toner as a developer might include toner originally having a charge  
 20 polarity reverse to the normal polarity mixed therein, though the amount thereof is small. In addition, even toner having a normal charge polarity can be reversed in its polarity by an influence of a transferring bias or separation electric discharge, or the charge amount of the toner can be reduced by static elimination.

As per the above, the transfer residual toner is a mixture of toner having a normal charge  
 25 polarity, toner having a reversed polarity (i.e. reversely charged toner) and toner having relatively small charge amount. Among these toners, the reversely charged toner and the toner having a

5 small charge amount are likely to adhere to the contact charging apparatus upon passing through the charging portion in the form of the ~~contact nip~~ contact-nip portion between the photosensitive member and the contact charging apparatus.

In addition, in order for the transfer residual toner remaining on the photosensitive member to be removed and recovered or collected by the ~~leaning~~ simultaneous with developing  
10 in the developing apparatus, it is necessary that the charge polarity of the transfer residual toner on the photosensitive member to be carried through the charging portion to the developing portion be normal and that the transfer residual toner have such a charge amount that allows development of electrostatic latent images on the photosensitive member. In some cases, reversely charged toner and toner having an inappropriate charge amount cannot be removed or  
15 recovered from the surface of the photosensitive member to the developing apparatus, so that they sometimes cause image errors.

In view of the above-described situations, the applicant of this patent application has proposed, as disclosed in U.S. Patent No. 6,421,512 ~~6,412,512~~, an image forming apparatus provided with developer charge amount control means serving as first developer charging means  
20 for charging residual developer disposed upstream of charging means serving as a charger for charging a photosensitive member and residual developer uniformizing means serving as second developer charging means for charging residual developer disposed upstream of the developer charge amount control means and downstream of a transferring portion.

A DC voltage with normal polarity equal to or larger than the breakdown voltage is  
25 applied to the developer charge amount control means, so that transfer residual toner passing through it is charged with the normal polarity by a sufficient electric discharge. Thus, on the

5 occasion that the photosensitive member is subjected to charging over the transfer residual toner in the charging process by the contact charging member, the transfer residual toner that has been charged with the normal polarity does not adhere to the contact charging member. In addition, the residual developer uniformalizing means disperses a patterned transfer residual toner image on the photosensitive member, which is carried from the transferring portion to the developer  
10 charge amount control means, over the surface of the photosensitive member to decompose the pattern. The dispersed (or distributed) transfer residual toner is then sufficiently charged with the normal polarity by the developer charge amount control means.

On the other hand, in the case that the developer charge amount control means and the residual developer uniformalizing means have ~~electro-conductive~~ electroconductive fiber brush  
15 portions and the transfer residual toner remaining on the photosensitive member is dispersed and distributed by those ~~electro-conductive~~ electroconductive fiber brush portions brought into contact with the photosensitive member, toner is sometimes fused to the surface of the photosensitive member to cause image errors.

The reason why toner is fused to the surface of the photosensitive member is considered  
20 as follows. Since the transfer residual toner having passed through the residual developer uniformalizing means and the developer charge amount control means has a high charge amount, through its polarity is normal, it is impossible to recover the transfer residual toner as it is in the developing apparatus. So, an AC voltage is applied to the contact charging apparatus, so that the charge amount of the transfer residual toner is controlled to be an appropriate amount by the  
25 static elimination effect of the AC voltage. However, even with such a countermeasure, local excessive charging of the transfer residual toner cannot be prevented in some cases. In that case,

5 the mirroring force of the photosensitive member and the excessively charged transfer residual toner becomes so strong that the toner does not adhere to the contact charging member, cannot be recovered by the developing apparatus and cannot be transferred by the transferring means. As a result, the excessively charged transfer residual toner is fused to the surface of the photosensitive member.

10 In view of the above, the applicant (inventors) of the present patent application has proposed, as disclosed in Japanese Patent Application Laid-Open No. 2001-215799, an image forming apparatus provided with an equipment for moving the developer charge amount control means and the residual developer uniformalizing means back and forth (this movement will be referred to as reciprocating movement hereinafter) in the longitudinal direction of the  
15 photosensitive member.

With the reciprocating movement of the developer charge amount control means and the residual developer uniformalizing means in the longitudinal direction of the photosensitive member, it was possible to avoid local excessive charging of the transfer residual toner positively and satisfactory images could be obtained without fusion of toner to the surface of the  
20 photosensitive member.

However, in the above-described image forming apparatus utilizing the leaning simultaneous with developing and the roller charging process, in the case that developer charge amount control means equipped with an ~~electro-conductive~~ electroconductive fiber brush portion is provided and the developer charge amount control means and the residual developer  
25 uniformalizing means are reciprocated, the following problems arise.

5 (1) When the reciprocating movement brings end faces (with respect to the axial direction of the photosensitive member) of the developer charge amount control means and the residual developer uniformizing means to a position inside the range (or length) of the developer carrying portion of the developing apparatus, the following problem might arise.

The developing apparatus causes fog toner (i.e. toner that adheres to a non-image portion  
10 in which developer should not adhere) to adhere to the photosensitive member, though the amount of the fog toner is not large. The fog toner includes toner having a charge polarity reverse to the normal polarity and toner that has little charge. In addition, there is transfer residual toner on the photosensitive member after the transferring process, though the amount of the transfer residual toner not large. The transfer residual toner also includes toner having a  
15 charge polarity reverse to the normal polarity and toner that has little charge.

Consequently, in the case that end faces of the developer charge amount control means and the residual developer uniformizing means are brought ~~to~~ inside the range of the developer carrying portion of the developing apparatus in the course of the reciprocating movement, when the fog toner and the transfer residual toner are brought into direct contact with the contact  
20 charging member without passing through the developer charge amount control means and the residual developer uniformizing means, such toner will adhere to the contact charging member to bring about toner contamination of the contact charging apparatus beyond an acceptable degree. As a result, a charging error might be caused.

(2) When the reciprocating movement brings end faces of the developer charge amount  
25 control means and the residual developer uniformizing means ~~to~~ inside the range of the developer carrying portion of the developing apparatus, toner adheres to the surface of the

5 developer charge amount control means and the residual developer uniformizing means. When the portion of those means at which toner has adhered is moved to a position outside the range of the developer carrying portion of the developing apparatus, the following problem might arise.

The fog toner or the transfer residual toner that has been brought to a position outside the range of the developer carrying portion of the developing apparatus has been controlled by the  
10 developer charge amount control means and the residual developer uniformizing means to have a normal polarity and an appropriate charge amount. Consequently, such toner will scarcely adhere to the contact charging member, but cannot be recovered by the developing apparatus. As a result, toner adheres to and accumulates on the photosensitive member, so that problems such as toner scattering sometimes occur.

## 15 SUMMARY OF THE INVENTION

An object of the present invention is to provide an image forming apparatus and a process cartridge that are improved in ability of removing and recovering (or collecting) transfer residual developer utilizing developer charging means that is movable in the longitudinal direction of an image bearing member.

20 A further object of the present invention is to provide an image forming apparatus and a process cartridge that can suppress adhesion of developer to a charger to prevent formation of an abnormal image due to a charge error, even in the case that developer charging means is moved.

It is another object of the present invention to provide an image forming apparatus and a process cartridge that can suppress accumulation of developer to prevent developer scattering,  
25 even in the case that developer charging means is moved.

5           It is yet another object of the present invention to provide an image forming apparatus and a process cartridge in which transfer residual developer on an image forming member after a transferring process is prevented from passing through developer charging means without being subjected to the operation of developer charging means.

10           It is still another object of the present invention to provide an image forming apparatus and a process cartridge that is adapted in such a way that residual developer is charged to have an appropriate charge amount before the residual toner on an image bearing member reaches the charging position of a charger.

          Further objects and features of the present invention will become apparent from the following description with reference to the accompanying drawings.

15   BRIEF ~~DESCRIPTION~~ DESCRIPTION OF THE DRAWINGS

          Fig. 1 is a cross sectional view schematically showing an embodiment of an image forming apparatus according to the present invention.

          Fig. 2 is a cross sectional view schematically showing a process cartridge adapted to be attached to the image forming apparatus shown in Fig. 1.

20           Fig. 3 is a schematic diagram showing a the relationship of the longitudinal length (or the developing width) of a developer coating portion of a developing sleeve and the longitudinal length of developer charge amount control means and residual developer uniformizing means.

          Fig. 4 is a schematic diagram showing a the relationship of the longitudinal length of a developer carrying portion (or the developing width) of a developing sleeve, the longitudinal



length of developer charge amount control means and residual developer uniformizing means, the longitudinal length of a charging roller and a coating portion of a photosensitive drum.

Fig. 5 is a schematic diagram showing a the relationship of the longitudinal length of a developer carrying portion (or the developing width) of a developing sleeve, the longitudinal length of developer charge amount control means and residual developer uniformizing means, the longitudinal length of a charging roller, the longitudinal length of a coating portion of a photosensitive drum, the longitudinal length of a primary transfer roller and the longitudinal length of a cleaning blade of an intermediate transferring belt cleaner.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

In the following, an image forming apparatus and a process cartridge according to the present invention will be specifically described with reference to the drawings.

Fig. 1 schematically shows the structure of an embodiment of the image forming apparatus according to the present invention. The image forming apparatus 100 according to the present embodiment is a color laser printer with ~~the~~ a maximum sheet size to be supplied ~~of~~ with A-4 size recording material that utilizes a ~~transferring type~~ transferring-type electrophotography process, a contact charging process and a reversal development process. The image forming apparatus 100 can form full color images on transferring materials, such as paper sheets, OHP sheets or fabrics based on image information sent from an external host apparatus that is connected to the body of the image forming apparatus (or apparatus body) in such a way as to be capable of communicate with the apparatus body and output them.

5           The image forming apparatus 100 is an image forming apparatus of a four-drum system (in-line) equipped with a plurality of process cartridges 8, in which toner images are first sequentially transferred onto an intermediate transferring member 91 in an multi-layered manner by the respective process cartridges 8, and then the toner images are transferred from the intermediate transferring member 91 onto a transferring material P at one time, so that a full  
10 color print image is formed. There are four process cartridges 8 disposed in series along the moving direction of the intermediate transferring belt 91 serving as the intermediate transferring member in the order of the yellow process cartridge, the magenta process cartridge, the cyan process cartridge and the black process cartridge.

          In this embodiment, image forming portions (i.e. image forming stations) PY, PM, PC  
15 and PBk for the respective colors of yellow (Y), magenta (M), cyan (C) and black (Bk) serving as multiple image forming means have the same structure except that the colors of the developers used therein are different. Therefore, suffixes Y, M, C and Bk for indicating the respective image forming portions to which various elements belong will be omitted in the following description and the elements will be collectively described, unless a distinction is required.  
20 ~~needed.~~

          Here, an overall operation of the image forming apparatus 100 upon forming, for example, a full color image by four color process will be described. Color separated image signals are generated based on a signal sent from an external host apparatus that is connected to the image forming apparatus 100 in such a way as to be capable of communicating with the  
25 image forming apparatus. Based on those image signals, toner images of the respective colors are formed in the respective process cartridges 8Y, 8M, 8C and 8Bk of the respective image

5 forming portions PY, PM, PC and PBk. In each of the process cartridges 8Y, 8M, 8C and 8Bk, an electrophotographic photosensitive member (i.e. a photosensitive drum) 1 serving as an image bearing member (or image carrier members) is charged by charging means 2 serving as a charger, and the uniformly charged surface of the photosensitive drum 1 is subjected to scanning exposure by exposure means 3, so that an electrostatic latent image is formed on the photosensitive drum

10 1. The electrostatic latent image is supplied with toner as a developer by developing means 4, so that a toner image is formed. The toner images of respective colors thus formed on the respective photosensitive drums 1 are sequentially transferred onto the intermediate transferring belt 91, serving as a moving intermediate transferring member (or the second image bearing member), in a multi-layered (or superposed) manner. The full color toner image thus formed on

15 the intermediate transferring belt 91 is transferred at one time onto a transferring material P that has been conveyed to a secondary transferring portion at which the intermediate transferring belt 91 and a secondary transfer roller 10, serving as a secondary transferring means, are opposed to each other. After that, the transferring material P is conveyed to fixing means mean 12, also called a roller fixing device, in which the toner image is fixed, and then discharged to the exterior

20 of the apparatus.

In the following, elements in the image forming apparatus 100 will be more specifically described with additional reference to Fig. 2.

The image forming apparatus 100 has the electrophotographic photosensitive member of a rotary drum-type member ~~drum-type~~ (i.e. photosensitive drum) 1 serving as an image bearing

25 member. In this embodiment, the photosensitive drum 1 is an organic photoconductor (OPC) drum having a longitudinal length of 370mm and an outer diameter of 30mm. The drum is

5 driven to rotate about its central support shaft in the counterclockwise direction indicated by  
arrows inside drum 1 in Figs. 1 and 2 at a process speed (in terms of the circumferential speed) of  
100mm/sec. The photosensitive drum 1 has the structure including an aluminum cylinder (or  
~~electro-conductive~~ electroconductive drum base) the surface of which is coated with a primer  
layer for suppressing interference of light and improving adhesivity of the upper layer, a  
10 photo-charge generating layer and a charge transfer layer (having a thickness of 20  $\mu\text{m}$ ) in the  
mentioned order from the bottom, which three layers constitute a photosensitive layer. The  
longitudinal length of the coating portion that can be charged by a contact charging process (i.e.  
the chargeable portion) or the coating width is designed to be 340mm.

In this embodiment, the image forming apparatus 100 has as charging means comprising  
15 a charging roller 2 in the form of a contact charger. A voltage that satisfies a predetermined  
condition is applied to the charging roller 2 so that the photosensitive drum 1 is uniformly  
charged with a negative polarity. The charging roller 2 has a three-layered structure including a  
bottom layer 2b, an intermediate layer 2c and a surface layer 2d layered on the outer surface of a  
metal core (or a supporting member) 2a in the mentioned order from the bottom. The bottom  
20 layer 2b is a foamed sponge layer for reducing the charging sound, the intermediate layer 2c is a  
resistance layer for realizing a uniform resistance of the charging roller 2 as a whole, and the  
surface layer 2d is a protect layer for preventing leakage in case a defect, such as a pin hole, is  
present on the photosensitive drum 1. In the charging roller 2 in this embodiment, the metal core  
2a is a round rod made of a stainless steel having a diameter of 6mm, and the surface layer is  
25 made of a fluorocarbon resin dispersed with carbon. The outer diameter of the charging roller 2

5 is 14mm, the resistance of the roller is  $10^4$  to  $10^7\Omega$ , and the longitudinal length of the charging portion (i.e. the operating portion) or the charging width is 320mm.

The charging roller 2 is rotatably supported by bearing members at both end portions of the metal core 2a and biased toward the photosensitive drum 1 by a press spring so that the charging roller is in pressure contact with the surface of the photosensitive drum 1 with a  
10 predetermined pressurizing force. In addition, the charging roller is driven by the rotation of the photosensitive drum 1 so as to rotate. From an electric power source 20 functioning as a voltage applying means, a predetermined oscillating voltage in which a DC voltage and an AC voltage with a predetermined frequency are superimposed (a charging bias voltage from  $V_{dc}+V_{ac}$ ) is applied to the charging roller 2 via the metal core 2a, so that the circumferential surface of the  
15 rotating photosensitive drum 1 is charged up to a predetermined electric potential. The contact portion between the charging roller 2 and the photosensitive drum 1 constitutes a charging portion a.

In this embodiment, the charging bias voltage applied to the charging roller 2 is an oscillating voltage (or vibrating voltage) in which a DC voltage of -500V and a sinusoidal wave  
20 AC voltage with a frequency of 1150Hz and a peak to peak voltage  $V_{pp}$  of 1400V are superimposed, so that the circumferential surface of the photosensitive drum 1 is charged up to -500V (the dark portion potential  $V_d$ ) by the contact charging process.

A charging roller cleaning member 2f is provided for the charging roller 2. In this embodiment, the charging roller cleaning member 2f is a cleaning film having elasticity, and the  
25 longitudinal length of it is designed to be 330mm. The cleaning film 2f is disposed parallel to the longitudinal direction of the charging roller 2, and one end of the cleaning film 2f is fixed to a

5 supporting member 2g that reciprocates in the longitudinal direction with a constant stroke. The cleaning film 2f is disposed in such a way that its surface near the free end forms a contact nip with the charging roller 2. In this embodiment the cleaning film 2f is reciprocated with a stroke of 6mm. The supporting member 2g is driven by a driving motor of the image forming apparatus 100 via a gear train to reciprocate in the longitudinal direction with a constant stroke. Thus, the  
10 cleaning film 2f slides in contact with the surface layer 2d of the charging roller 2. As a result, contaminators (such as fine powder toner or external additive) adhering on the surface layer 2d of the charging roller 2 are removed. In addition, in order to return toner from the charging roller 2 to the photosensitive drum 1 in the case that toner adheres to the charging roller 2, it is desirable that the cleaning film 2f ~~triboelectrically~~ triboelectrically charges the toner adhering to the  
15 charging roller 2 with a normal charge polarity (i.e. the minus).

After the photosensitive drum 1 is uniformly charged by the charging roller 2 up to a predetermined potential with predetermined polarity, the photosensitive drum 1 is subjected to image exposure L by image exposure means (including color separating and imaging optical systems for color original images, a scanning exposure system utilizing laser scanning for  
20 outputting a laser beam that is modulated in accordance with a time-series electrical digital pixel signal of image information etc.). Thus, ~~electric~~ electrostatic latent images of a target color image corresponding to the color components of the respective image forming portions PY, PM, PC and PBk are formed. In this embodiment, a laser beam scanner 3 utilizing a semiconductor laser is used as exposure means. The laser beam scanner 3 outputs a laser beam that is  
25 modulated in accordance with an image signal sent from a host apparatus such as an image reading apparatus (not shown in the drawings) to the image forming apparatus 100 to perform

5 laser scanning exposure (or image exposure) of the uniformly charged process surface of the rotating photosensitive drum 1. With the laser scanning exposure, the ~~electric~~ electrical potential of the area of the surface of the photosensitive drum 1 that has been irradiated with the laser beam L drops, so that an electrostatic latent image corresponding to the image information used in the scanning exposure is formed on the surface of the photosensitive drum 1. In this  
10 embodiment, the ~~electric~~ electrical potential of the exposed area is -150V. The position on the photosensitive drum 1 that is irradiated with image exposure light L is referred to as an exposure portion b.

Then, the electrostatic latent image formed on the photosensitive drum 1 is developed with toner by the developing device 4 serving as developing means. The developing device 4  
15 used in this embodiment is a two-component contact developing device (i.e. a two component magnetic brush developing device). The developing device 4 is equipped with a developing container (the main body of the developing device) 40, a developing sleeve 41 functioning as a developer carrying member having a magnet roller fixedly provided in the interior thereof, a developer regulation blade 42 serving as a developer regulating member, two-component  
20 developer (developer) 46 as a mixture including mainly resin toner particles (toner) and magnetic carrier particles (carrier) and developer agitating members 43 and 44 disposed at the bottom of the developing container 40.

The developing sleeve 41 is rotatably provided in the interior of the developing container 40 with a part of its outer circumferential surface being exposed to the exterior of the developing  
25 container 40. The outer diameter of the developing sleeve 41 is designed to be 16mm and the longitudinal length (or the developing width) of the developer carrying portion (i.e. the portion

5 coated with developer) is designed to be 310mm. The developer regulation blade 42 is opposed to the developing sleeve 41 with a predetermined gap (250  $\mu\text{m}$ ) between them, so that a thin layer of developer is formed on the developing sleeve 41 as the developing sleeve rotates in the direction indicated by an arrow in Fig. 2). In this embodiment, the developing sleeve 41 is disposed closely opposed to the photosensitive drum 1 with the minimum distance (S-D gap) being maintained to be 400  $\mu\text{m}$ . The portion at which the photosensitive drum 1 and the developing sleeve 41 are opposed to each other is referred to as a developing portion c.

The developing sleeve 41 is driven to rotate in the direction at the developing portion c reverse to the traveling direction of the photosensitive drum 1 at a circumferential speed 1.7 times as high as the circumferential speed of the photosensitive drum 1. The thin layer of the developer on the developing sleeve 41 is in contact with the surface of the photosensitive drum 1 at the developing portion c, so that the thin layer of the developer slides in contact with the photosensitive drum 1 appropriately. A predetermined developing bias voltage is applied to the developing sleeve by an ~~electric~~ electrical power source (not shown) serving as voltage applying means. In the case of this embodiment, the developing bias voltage applied to the developing sleeve 41 is an oscillating voltage in which a DC voltage ( $V_{dc}$ ) and an AC voltage ( $V_{ac}$ ) are superimposed. More specifically, it is an oscillating voltage in which a DC voltage  $V_{dc}$  of -350V and an AC voltage  $V_{ac}$  of 1800V<sub>pp</sub> with a frequency of 2300Hz are superimposed.

As per the above, the surface of the rotating developing sleeve 41 is coated with the thin layer of the developer 46, and toner contained in the developer delivered to the developing portion c selectively adheres, with the aid of an electric field generated by the developing bias voltage, to the photosensitive drum 1 in accordance with the electrostatic latent image formed on



5 the photosensitive drum 1. Thus, the electrostatic latent image is developed as a toner image. In the case of this embodiment, toner adheres to the exposed bright portion on the photosensitive drum 1, so that the electrostatic image is reversal-developed. The thin layer of the developer on the developing sleeve having passed through the developing portion c is returned to a developer pool in the developing container 40 as the developing sleeve 41 further rotates.

10 Furthermore, agitating screws 43 and 44 serving as developer agitating members are provided in the interior of the developing device 4. The agitating screws 43 and 44 are rotated in synchronization with the rotation of the developing sleeve 41. The agitating screws 43 and 44 function to agitate supplied toner so as to mix the toner with carrier so that a predetermined charge is given to the toner. In addition, the agitating screws 43 and 44 carry the developer 46 in  
15 the opposite directions along the longitudinal direction to supply the developing sleeve 41 with the developer 46 and function to carry the developer 46 that has been lowered in toner concentration (i.e. the proportion of the toner in the developer) through the developing process to a toner replenishing portion so as to cause the developer 46 to circulate in the developing container.

20 On the wall of the developing device 4 and at a position upstream of the screw 44, there is provided a toner concentration sensor 45 for sensing the toner concentration of the developer 46 by detecting a variation in the magnetic permeability of the developer. A toner replenishing opening 47 is provided at a position slightly downstream of the toner concentration sensor 45 with respect to the circulating direction of the developer 46. After the developing operation, the  
25 developer 46 is carried to the position of the toner concentration sensor 45, at which the toner concentration is detected. Based on the result of the detection, toner is supplied fitly from a

5 developer replenishing container (i.e. a toner replenishing unit) 5 connected to the developing  
 device 4 through the toner replenishment opening 47 by virtue of rotation of a screw 51 equipped  
 in the toner replenishing unit 5. The supplied toner is carried by the agitating screw 44 so as to  
 be mixed with carrier and imparted with appropriate charge, and then carried to the vicinity of  
 the developing sleeve 41, on which the toner is formed into a thin layer so as to be used for  
 10 development.

The toner used in this embodiment is a negatively charged toner with an average particle  
 diameter of 6  $\mu\text{m}$  and the carrier is a magnetic carrier with a saturation magnetization of  
 205  $\text{emu/cm}^3$  and an average particle diameter of 35  $\mu\text{m}$ . The developer is a mixture including  
 the toner and the carrier with a ratio of 6:94. The charge amount of the toner used for  
 15 development on the photosensitive drum 1 is  $-25 \mu\text{C/g}$ .

An intermediate transferring unit 9 serving as transferring means is provided in such way  
 as to be opposed to the photosensitive drums 1 of the respective image forming portions PY, PM,  
 PC and PBk. The intermediate transferring unit 9 includes the endless intermediate transferring  
 belt 91 serving as an intermediate transferring member (or the second image bearing member)  
 20 that is looped around a driving roller 94, a tension roller 95 and a secondary transfer opposed  
 roller 96 with a predetermined tension. The intermediate transferring belt 91 moves in the  
 direction indicated by an arrow adjacent the belt 91 in Fig. 1.

The toner image formed on the photosensitive drum 1 enters a primary transfer nip  
 portion (transferring portion)  $\text{d}$   $\underline{\text{z}}$  at which the photosensitive drum 1 and the intermediate  
 25 transferring belt 91 are opposed to each other. In the transferring portion  $\underline{\text{z}}$   $\text{d}$ , a primary transfer  
 roller 92 serving as primary transferring means abuts the backside of the intermediate transferring

5 belt 91. The primary transfer roller 92 is made of an ~~electro-conductive~~ electroconductive sponge that is designed to have a resistance of  $10^6 \Omega$  and an outer diameter of 16mm. The longitudinal length of the abutting portion (i.e. the operating portion) is designed to be 330mm. Primary transferring bias power sources 93, serving as voltage applying means, are connected to the respective primary transfer rollers 92 so that primary transferring bias voltages can be applied

10 in the respective image forming portions PY, PM, PC and PBk independently from each other. A yellow toner image formed on the photosensitive drum 1 of the first (yellow) image forming portion PY in accordance with the above-described process is transferred onto the intermediate transferring belt 91 first, and toner images of magenta, cyan and black formed by the same process are transferred from the photosensitive drums 1 of the respective colors onto the

15 intermediate transferring belt 91 in the respective image forming portions PM, PC and PBk in ~~the~~ a multi-layered manner.

In this embodiment, a primary transferring bias voltage of +350V is applied for all of the first to fourth colors taking into account ~~transfer~~ the transfer efficiency of the toner transferred to the exposed portion (with an exposed portion potential  $V_l$  of -150V). The color image

20 composed of four colors formed on the intermediate transferring belt 91 is then transferred by a secondary transfer roller 10, serving as secondary transferring means, at one time onto a transferring material P that has been fed from transferring material feeding means (not shown) and delivered from a sheet feed rollers ~~12~~ 13 serving as conveying means at a predetermined timing.

25 The transferring material P on which the toner image has been transferred is then conveyed to a roller fixing device 12 serving as fixing means, in which the toner image is fused

5 and fixed on the transferring material by heat and pressure. After that, the transferring material P is discharged to the exterior of the apparatus. Thus, a color print image is obtained.

As a material for the intermediate transferring belt 91, an extendable material is not appropriate, but a resin belt, a rubber belt including a metal stiffener or a belt made of a resin and a rubber is desirable in order to realize good registration in the image forming apparatus PY, PM, 10 PC and PBk of respective colors. In this embodiment, a resin belt made of a polyimide (PI) that is dispersed with carbon so that the volume resistivity is controlled to be of an order of  $10^8 \Omega \cdot \text{cm}$  is used. The belt has a thickness of 80  $\mu\text{m}$ , a longitudinal length of 390mm and a circumferential length of 900mm.

15 Secondary transfer residual toner remaining on the intermediate transferring belt 91 is cleaned by a cleaning blade 11a serving as cleaning means equipped in an intermediate transferring belt cleaner 11 in preparation for the next image forming process. The longitudinal length of the abutting portion (i.e. the operating portion) of the cleaning blade is designed to be 330mm.

Furthermore, each of the image forming portions PY, PM, PC and PBk is provided with 20 developer charge amount control means (or the first developer charging means) 6 and residual developer uniformizing means (or the second developer charging means) 7, each of which is in contact with the photosensitive drum 1. In this embodiment, both the developer charge amount control means 6 and residual developer uniformizing means comprise brushes made of ~~electro-conductive~~ electroconductive fibers. More specifically, the developer charge amount 25 control means 6 includes a transversely extending electrode plate 62 on which a brush portion (i.e. an operating portion) 61 is provided. The residual developer uniformizing means 7 also

5 includes an electrode plate 72 on which a brush portion (i.e. an operating portion) 71 is provided. The brush portions 61 and 71 are arranged to be in contact with the surface of the photosensitive drum 1.

The resistance values of the brush portions 61 and 71 of the developer charge amount control means 6 and the residual developer uniformizing means 7 are controlled ~~in there~~  
10 ~~resistance values~~ by including carbon or a metal powder in a fiber such as rayon, acrylic or polyester. It is preferable that the brush portions 61 and 71 have a bristle size equal to or less than 30 denier and a density of 10,000 to 500,000 number/inch<sup>2</sup> in order that they can abut the surface of the photosensitive drum 1 and the transfer residual toner uniformly. In the case of this embodiment, the brush portions 61 and 71 have a bristle size of 6 denier and a density of 100,000  
15 number/inch<sup>2</sup>, a bristle length of 5mm and a volume resistivity of the brush portions of  $6 \times 10^3 \Omega \cdot \text{cm}$ .

The developer charge amount control means 6 and the residual developer uniformizing means 7 are disposed substantially parallel with the longitudinal direction of the photosensitive drum 1 and fixed to a supporting member 79 that is adapted to move back and forth (i.e.  
20 reciprocate) in the longitudinal direction by a constant stroke so that the brush portions 61 and 71 abut the photosensitive drum 1 with an intruding amount of 1mm and a an abutting nip portion width of 5mm.

In the case of this embodiment, the supporting member 79 receives rotational drive, which is transmitted to the photosensitive drum 1 from a driving motor (not shown) of the image  
25 forming apparatus, via a gear train so as to be driven to move back and forth (or reciprocate) in the longitudinal direction by a constant stroke. Thus, the brush portion 61 of the developer

5 charge amount control means 6 and the brush portion 71 of the residual developer uniformizing means 7 slide in contact with the surface of the photosensitive drum 1. In this embodiment, the stroke d of the reciprocating movement (or reciprocating amount) is designed to be 5mm.

As shown in Fig. 2, in the arrangement according to this embodiment, the residual developer uniformizing means (or the second developer charging means) 7, and the developer charge amount control means (or the first developer charging means) 6 are disposed in the downstream side of the transferring portion d z and the upstream side of the charging portion a with respect to the direction of the rotation of the photosensitive drum and arranged in the mentioned order from the upstream side. The residual developer uniformizing means 7 forms a contact portion e with the photosensitive drum 1 and the developer charge amount control means 6 forms a contact portion f with the photosensitive drum 1.

In the case of this embodiment, a DC voltage of negative polarity that is the same as the normal charge polarity of the developer is applied to the developer charge amount control means 6 by a power source 21 serving as a voltage applying means. On the other hand, a voltage in which a DC voltage having positive polarity that is reverse to the normal charge polarity of the developer and an AC voltage are superimposed is applied to the residual developer uniformizing means 7 by a power source 22 serving as voltage applying means.

The voltage applying means, such as power sources 20, 21, 22 equipped in the image forming apparatus 100 are controlled by a control circuit 130 serving as control means for performing overall control of the operations of the apparatus provided in the body of the image forming apparatus.

5 In this embodiment, the photosensitive drum 1, the charging roller 2, the charging roller  
cleaning member 2f, the developer 4, the residual toner uniformizing means 7, and the toner  
charge amount control means 6 are integrated as a cartridge by a charge unit frame 111 and a  
developing frame 112 to form a process cartridge 8. The process cartridge 8 is detachably  
10 attached (or mounted) via attaching means 110a provided on the body of the image forming  
apparatus. Under the state in which the process cartridge 8 is attached to the body of the image  
forming apparatus, driving means (not shown) provided in the body of the image forming  
apparatus and drive transmission means provided in the process cartridge are connected, so that  
the state that enables driving of the photosensitive drum 1, the developing device 4 and the  
charging roller 2 etc. is realized. In addition, under the state in which the process cartridge 8 is  
15 attached to the body of the apparatus, various voltage applying means, such as power sources 20,  
21 and 22, for applying bias voltages to the residual toner uniformizing means 7 and the power  
source (not shown) for applying a bias to the developing sleeve 41 are in electrical contact with  
their objects via contact points provided on the process cartridge 8 and the body of the image  
forming apparatus.

20 The toner replenishing unit 5 is detachably attached to the developing device 4 and the  
body of the image forming apparatus via attaching means 110b. With the detachability of the  
process cartridge 8 and the toner replenishing unit 5 to the body of the image forming apparatus,  
replacement of consumable supplies or maintenance of the apparatus can be performed by a user  
when for example, the service life of the photosensitive drum 1 expires or the replenishing toner  
25 runs out, by for example, replacing the process cartridge. Thus, operability and ease of  
maintenance are greatly improved.

5           Next, operations of the residual toner ~~informalizing~~ uniformalizing means 7 and the toner charge amount control means 6 will be detailed hereinbelow.

          The developing device 4 causes fog toner to adhere to the surface of the photosensitive drum 1, though the amount of the fog toner is small. The fog toner includes toner having a charge polarity reverse to the normal charge polarity (i.e. having positive polarity, in this  
10   embodiment) and toner that has little charge. In addition, there is transfer residual toner on the photosensitive drum 1 after the transferring process, though the amount of the transfer residual toner is small. The transfer residual toner includes toner with a negative polarity (i.e. the normal polarity) in the image portion, toner with a positive polarity (i.e. the reverse polarity) in the non-image portion and toner whose polarity has been reversed into positive polarity by an the  
15   influence of a positive transferring voltage (reversely charged toner).

          The developer charge amount control means 6 and the residual developer uniformalizing means 7 control the charge amount of such toner having positive polarity, toner having the reverse polarity, and toner having little charge amount so as to prevent adhesion of toner to the charging roller 2 and to increase toner recovery in the developing device 4.

20           The residual developer uniformalizing means 7 makes the charge polarity of the residual toner on the photosensitive drum 1 after the transferring process uniformly positive. At the same time, the surface potential of the photosensitive drum 1 is also made uniform. The residual toner on the photosensitive drum 1 is then strongly charged with negative polarity by the developer charge amount control means 6. In other words, the charge polarity of the residual toner is made  
25   same as the charge polarity of the charger 2. Consequently, the residual toner on the photosensitive drum 1 is prevented from adhering to the charging roller 2, even when it passes by



5 the charging roller 2 serving as the charger. In addition, since the toner that has been charged by the developer charge amount control means is strongly charged ~~with~~ to a positive polarity, it is hard to be recovered in the developing device 4. Therefore, it is preferable that the residual toner on the photosensitive drum 1 be subjected to static reduction by the charging roller 2 as it passes by the charging roller 2. The static reduction of the residual toner by the charging roller 2 is realized by an effect of an oscillating voltage (especially an AC voltage) applied to the charging roller 2. The residual toner that has an appropriate negative charge amount ~~thanks~~ due to the static reduction by the charging roller 2 is recovered by a recovering operation that is performed simultaneous with the developing operation by the developing device 4. Alternatively, the residual toner may be recovered by the intermediate transferring member (or a transferring belt for carrying and conveying transferring materials).

The developer charge amount control means 6 and the residual developer uniformalizing means 7 are reciprocated by a constant stroke in the longitudinal direction of the photosensitive drum 1. With this movement, it is possible to avoid local excessive charging of the transfer residual toner with respect to the longitudinal direction of the photosensitive drum 1 and to obtain a satisfactory image free from fusion of toner on the surface of the photosensitive drum 1.

However, with a change in the positional relationship between the developer carrying portion (i.e. the portion coated with developer) and the developer charge amount control means 6 and the residual developer uniformalizing means 7 caused by the reciprocating movement of the developer charge amount control means 6 and the residual developer uniformalizing means 7, the aforementioned problems (1) and (2) sometimes arise.

5            Fig. 3 shows the positional relationship between the developer carrying portion G of the  
developing sleeve 41, or the developing area on the photosensitive drum 1, and the end faces of  
the brush portion (which will be referred to as the first brush hereinafter) 61 of the developer  
charge amount control means 6 and the brush portions (which will be referred to as the second  
brush hereinafter) 71 of the residual developer uniformizing means 7, namely the side end faces  
10 (A to C) of the portion in contact with the photosensitive drum 1 with respect to the axial  
direction (i.e. the longitudinal direction) of the photosensitive drum 1.

            Position (A) shown in Fig. 3 is the reference position of the first brush 61 and the second  
brush 71, in which the longitudinal centers of the first brush 61, the second brush 71 and the  
developer carrying portion G are on the same line. On the other hand, position (B) is one of the  
15 marginal positions (the rightmost position in Fig. 3) of the reciprocating movement of the first  
brush 61 and the second brush 71, and position (C) is the other marginal position (the leftmost  
position in Fig. 3).

            In this embodiment, the longitudinal length of the first brush 61 and the longitudinal  
length of the second brush 71 are the substantially the same (indicated by L2 in Fig. 3).

20            It is necessary that the left end faces 61a and 71a in Fig. 3 be positioned outside the range  
of the developer carrying portion G of the developing sleeve 41 even when the first brush 61 and  
the second brush 71 are in position (B) in the course of the reciprocation movement (with a  
stroke or movement amount d). It is also necessary that the right end faces 61b and 71b in Fig. 3  
be positioned outside the range of the developer carrying portion G of the developing sleeve 41  
25 even when the first brush 61 and the second brush 71 are in position (C).

5           The above conditions are necessary in order to prevent generation of an abnormal image due to charging error that might be caused ~~under~~ in the situation that fog toner or transferring residual toner is in direct contact with the charging roller 2 without passing through the first brush 61 and the second brush 71 to adhere to the charging roller 2.

10           Thus, the apparatus is arranged in such a way that the end faces of the first brush 61 and the second brush 71 are kept outside the range of the developer carrying portion G of the developing sleeve 41 certainly even during the reciprocating movement. Specifically, the relationship of the longitudinal length  $L1$  (mm) of the developer carrying portion of the developing sleeve (i.e. the developing width  $L2$   $L1$  (mm) of the developing area) and the longitudinal length  $L2$  of the first brush 61 and the second brush 71 satisfies the following  
15 condition (1).

$$L1 + d \leq L2 \quad -- (1)$$

20           With this condition, fog toner or transfer residual toner is prevented from being brought into contact with the charging roller 2 directly, so that generation of an abnormal image due to charging error can be avoided. In this embodiment the length  $L1$  is designed to be 310mm, the length  $L2$  is designed to be 320mm, and the length  $d$  is designed to be 5mm.

Fig. 4 shows positional relationship of the developer carrying portion G of the developing sleeve 41, the end faces of the first brush 61 and the second brush 71, and the charging processing portion of the charging roller 2 and the photosensitive layer coating portion (i.e. the chargeable portion) of the photosensitive drum 1.

25           Position (A) shown in Fig. 4 is the reference position of the first brush 61 and the second brush 71, in which the longitudinal centers of the first brush 61, the second brush 71, the

5 developer carrying portion G, the charging processing portion of the charging roller 2 and the coating portion of the photosensitive drum 1 are on the same line. On the other hand, position (B) is one of the marginal positions (the rightmost position in Fig. 4) of the reciprocating movement of the first brush 61 and the second brush 71, and position (C) is the other marginal position (the leftmost position in Fig. 4).

10 Under the setting that the longitudinal length L1 (mm) of the developer carrying portion G of the developing sleeve 41 and the longitudinal length L2 (mm) of the first brush 61 and the second brush 71 satisfy the aforementioned condition (1), there is an area in the portion of the first brush 61 and the second brush 71 on which toner is adhering and that is brought to outside the range of the developer carrying portion G of the developing sleeve 41 in the course of the reciprocating movement.

15 As described before, since the fog toner and the transfer residual toner have been controlled by the developer charge amount control means 6 and the residual developer uniformizing means 7 to have a normal charge polarity and appropriate charge amounts, they scarcely adhere to the charging roller 2. However, the toner adhering on the first brush 61 and the second brush 71 that have been brought to outside the range of the developer carrying portion G of the developing sleeve 41 cannot be recovered by the developer carrying portion G of the developing sleeve 41. As a result, toner might adhere and accumulate on the surface of the photosensitive drum 1 in portion H shown in Fig. 4, so that problems such as toner scattering sometimes arise.

5           Given the above-described situation, the inventors ~~had~~ made strenuous studies and devised the following method for removing and recovering the toner adhering accumulating on the surface of the photosensitive drum 1.

Fig. 5 shows the positional relationship of the developer carrying portion G of the developing sleeve 41, the end faces of the first brush 61 and the second brush 71, the charging  
10   processing portion of the charging roller 2, the photosensitive layer coating portion of the photosensitive drum 1, the operating portion of the primary transfer roller 92 and the operating portion of the cleaning blade 11a equipped in the intermediate transferring belt cleaner 11.

Position (A) shown in Fig. 5 is the reference position of the first brush 61 and the second brush 71, in which the longitudinal centers of the first brush 61, the second brush 71, the  
15   developer carrying portion G, the charging processing portion of the charging roller 2 and the photosensitive layer coating portion of the photosensitive drum 1, the operating portion of the primary transfer roller 92 and the operating portion of the cleaning blade 11a are on the same line. On the other hand, position (B) is one of the marginal positions (the rightmost position in Fig. 5) of the reciprocating movement of the first brush 61 and the second brush 71, and position  
20   (C) is the other marginal position (the leftmost position in Fig. 5) of the reciprocating movement.

First, the toner adhering on the photosensitive drum 1 that cannot be recovered by the developer carrying portion G of the developing sleeve 41 (i.e. the toner in portions H shown in Fig. 5) is transferred and caused to adhere to the intermediate transferring belt 91 in the transferring portion d at any time.

25           In order for the toner adhering on portions H of the photosensitive drum 1 to be transferred and caused to adhere to the intermediate transferring belt 91 at any time, it is

5 necessary that ~~that~~ the charge of the toner is controlled ~~in its charge~~ to have a normal polarity and an appropriate charge amount. As described before, the charge amount of the toner that have passed through the developer charge amount control means 6 and the residual developer uniformizing means 7 is too high and the mirroring force with the photosensitive drum 1 is too strong, so that it cannot be transferred to the intermediate transferring belt 91.

10 Consequently, as described above, it is preferable that that toner be subjected to static elimination by an AC voltage applied to the charging roller 2. For that purpose, it is necessary that the longitudinal length of the charging roller 2 extend to the area outside the range of the developer carrying portion G of the developing sleeve 41 into which the portion of the first brush 61 and the second brush 71 on which toner is adhering is brought in the course of the  
15 reciprocating movement. Specifically, the apparatus is designed in such a way that the relationship between the longitudinal length L1 (mm) of the developer carrying portion G of the developing sleeve 41 and the longitudinal length L3 (mm) of the charging portion (or the charging width) of the charging roller 2 satisfies the following condition (2).

$$L1 + 2 \times d \leq L3 \quad \text{-- (2)}$$

20 With this condition, it is possible to make the residual toner ~~adhere~~ adhering on portion H of the photosensitive drum 1 in contact with the charging roller 2 reliably, so that the residual toner is caused to have appropriate an charge amount with a normal polarity by virtue of a the static elimination effect of the AC voltage applied to the charging roller 2. In practice, the length L3 is designed to be 320mm, in this embodiment. As a result, the toner adhering on the photosensitive  
25 drum 1 can be transferred to the intermediate transferring belt 91 so as to be removed from the photosensitive drum 1.

Furthermore, in order for the residual toner on the photosensitive drum 1 to be recovered onto the intermediate transferring belt all over the longitudinal area of the photosensitive drum 1, it is necessary that the longitudinal length of the operating portion of the primary transfer roller 92 extend to the area outside the range of the developer carrying portion G of the developing sleeve 41 into which the portion of the first brush 61 and the second brush 71 on which toner is adhering is brought in the course of the reciprocating movement. Specifically, the apparatus is designed in such a way that the relationship between the longitudinal length L1 (mm) of the developer carrying portion G of the developing sleeve 41 and the length of the operating portion (or transferring width) L4 (mm) of the primary transfer roller 92 satisfies the following condition (3).

$$L1 + 2 \times d \leq L4 \quad \text{-- (3)}$$

In practice, the length L4 is designed to be 330mm, in this embodiment.

Furthermore, it is necessary that the charging roller be in contact with the coating portion of the photosensitive drum 1 that has been charged. This is necessary in order to avoid leakage of a current from the charging roller 2 to the photosensitive drum 1. Consequently, the apparatus is designed in such a way that the relationship between the longitudinal length of the chargeable coating portion (or coating width) L5 (mm) of the photosensitive drum 1 and the charging width L3 (mm) of the charging roller 2 satisfies the following condition (4).

$$L3 \leq L5 \quad \text{-- (4)}$$

In practice, the length L5 is designed to be 340mm.

Then, the toner transferred and attached to the intermediate transferring belt 91 at any time can be recovered by the intermediate transferring belt cleaner 11. For that purpose, it is

5 necessary that the longitudinal length of the operating portion of the cleaning blade 11a equipped  
 in the intermediate transferring belt cleaner 11 extend to the area outside the range of the  
 developer carrying portion G of the developing sleeve 41 into which the portion of the first brush  
 61 and the second brush 71 on which toner is adhering is brought in the course of the  
 reciprocating movement. Specifically, the apparatus is designed in such a way that the  
 10 relationship between the longitudinal length L1 (mm) of the developer carrying portion G of the  
 developing sleeve 41 and the longitudinal length L6 of the operating portion of the cleaning  
 blade 11a satisfies the following condition (5).

$$L1 + 2 \times d \leq L6 \text{ -- (5)}$$

In practice, the length L6 is designed to be 330mm, in this embodiment.

15 In addition, similar to the case of the aforementioned charging roller, in order to prevent  
 current leakage from the first brush 61 to the photosensitive drum 1, the apparatus is designed in  
 such a way that the relationship between the longitudinal length L2 of the first brush 61 and the  
 coating width L5 of the photosensitive drum 1 satisfies the following condition (6).

$$L2 \leq L5 - d \text{ -- (6)}$$

20 In addition, it is normally preferable that the conditions  $L4 \leq L5$  and  $L6 \leq L5$  are met.

As per conditions (1) to (6), it was turned out that it is advantageous that the length L1  
 (mm) of the developer carrying portion G of the developing sleeve 41, the length L2 (mm) of the  
 first brush 61 and the second brush 71, the charging width L3 (mm) of the charging roller 2, the  
 length L4 (mm) of the operating portion of the primary transfer roller 92, the coating width L5  
 25 (mm) of the photosensitive drum 1, the length L6 (mm) of the operating portion of the cleaning  
 blade 11a and the reciprocating amount (or stroke) d (mm), all in the direction substantially



5 parallel to the longitudinal direction of the photosensitive drum 1 satisfy the following conditions.

$$L1 + d \leq L2 \leq L5 - d$$

$$L1 + 2 \times d \leq L3 \leq L5$$

$$L1 + 2 \times d \leq L4$$

10  $L1 + 2 \times d \leq L6$

We performed image formation with the image forming apparatus according to this embodiment designed in compliance with the above conditions, and it was confirmed that abnormal images, such as fogged images, were greatly suppressed and toner scattering, due to accumulation of toner on the photosensitive drum 1, was dramatically improved.

15 As per the above, according to this embodiment, with the design in which the end faces of the first brush 61 and the second brush 71 stay outside the range of the developer carrying portion G of the developing sleeve 41 even during reciprocating movement of the developer charge amount control means 6 and the residual developer uniformizing means 7, it is possible to positively prevent the generation of abnormal images due to charging error caused by toner  
20 adhering to the charging roller 2 and bringing about toner contamination beyond an acceptable degree.

In addition, in the case that the end faces of the first brush 61 and the second brush 71 are once brought inside the range of the developer carrying portion G of the developing sleeve 41, so that toner adheres to the surface of the first brush 61 and the second brush 71 and then the  
25 portion in which the toner is adhering is brought to outside the range of the developer carrying portion G of the developing sleeve 41 in the course of the reciprocation movement, it is possible

5 to transfer and attach the toner adhering on the photosensitive drum 1 that cannot be recovered by the developing device onto the intermediate transferring belt 9 by means of the primary transfer roller 92, by appropriately designing the relationship of the movement stroke  $d$  of the developer charge amount control means 6 and the residual developer uniformalizing means 7, the longitudinal length  $L1$  of the developer carrying portion  $G$  of the developing sleeve 41, the  
10 longitudinal length  $L2$  of the first brush 61 and the second brush 71, the charging width  $L3$  of the charging roller 2, the longitudinal length  $L4$  of the operating portion of the primary transfer roller 92, and the coating width  $L5$  of the photosensitive drum 41.

Furthermore, with the appropriate design of the longitudinal length  $L6$  of the operating portion of the cleaning blade 11a equipped in the intermediate transferring belt cleaner 11, it is  
15 possible to recover toner adhering on the intermediate transferring belt 91 by means of that cleaner, so that problems such as toner scattering due to accumulation of toner on the photosensitive drum 1 can be avoided positively. In addition, it is not necessary to provide special cleaning means for recovering the toner that has been transferred onto the intermediate transferring belt without being recovered by the developing apparatus. Therefore, the structure of  
20 the apparatus can be made simple.

While in the above-described embodiment the developer charge amount control means 6 and the residual developer uniformalizing means 7 are fixed to the same support member 79 and caused to reciprocate together, the present invention is not restricted by this feature. The structure may be modified in such a way that only the developer charge amount control means 6  
25 is reciprocated. Alternatively, the developer charge amount control means 6 and the residual developer uniformalizing means 7 may be reciprocated independently from each other so long as

5 the toner that have left the residual developer uniformizing means 7 and advances toward the downstream of the rotation of the photosensitive drum 1 can be subjected to the effect of the developer charge amount control means 6 positively. In addition, the present invention is also effectively applicable to systems that have only the developer charge amount control means 6.

10 In the above-described embodiment, the transfer destination member onto which toner is transferred from the respective image forming portions PY, PM, PC and PBk is an intermediate transferring member. However, as is well known to those skilled in the art, there is an image forming apparatus provided with, in place of the intermediate transferring member, a transferring material carrying member that carries a transferring material such as a recording paper sheet and conveys it to multiple image forming portions sequentially. In such an image forming apparatus, 15 toner images are sequentially transferred from the respective image forming portions (or image forming stations) onto the transferring material on the transferring material transferring member in a multi-layered manner, and then the transferring material is detached from the transferring material carrying member and conveyed to fixing means, in which an unfixed toner image is fixed, so that an a color image is obtained. The present invention can also be applied to this type 20 of image forming apparatus. In that case, the apparatus can be designed in a manner similar to the above-described apparatus provided with the intermediate transferring member, namely, in such a way that toner is transferred from the respective image forming portions onto the transferring material carrying member serving as a transfer destination member so as to be caused to adhere on the transferring material and then the toner on the transferring material 25 carrying member is removed and recovered by cleaning means such as a cleaning blade.

5 While in the above-described embodiment, the developer charge amount control means 6 and the residual developer uniformizing means 7 are constructed as fixed brush-like members, they may be changed to members of any other form such as sheet-like members.

The photosensitive drum 1 may be of a direct charge-injection type provided with a charge injection layer having a surface volume resistivity ~~of the surface~~ of  $10^9$  to  $10^{14} \Omega \cdot \text{cm}$ .

10 Even if the charge injection layer is not provided, in the case, for example, that a charge transfer layer has a resistance within the above range, the same effect can be realized. In addition, the photosensitive drum 1 may be an amorphous silicone photosensitive member having a surface volume resistivity ~~of the surface~~ of about  $10^{13} \Omega \cdot \text{cm}$ .

15 The shape or material of the elastic contact charging member may be a fur brush, a felt or a fabric in addition to the charging roller. Furthermore, more appropriate elasticity, electric conductivity, surface property or durability might be realized by a combination of various materials.

20 The waveform of an oscillating voltage component (i.e. an AC component or a voltage that changes periodically in its value) may be a sinusoidal wave, a rectangular wave or a triangular wave. It may be a rectangular wave formed by turning on and off a DC power source periodically.

25 The image exposure means serving as information writing means for the charged surface of the photosensitive member, functioning as an image bearing member, may be digital exposure means utilizing an array of solid state light emitting elements such as LEDs, besides the laser scanning means used in the embodiment. Alternatively, it may be an ~~analogue~~ analog image exposure means using a halogen lamp or a fluorescent lamp as a light source for illuminating

5 originals. In short, the image exposure means may be any means so long as it can form an electrostatic latent image corresponding to image information.

As has been described in the foregoing, according to the present invention, efficiency of removal and recovery of transfer residual developer from an image bearing member provided with developer charging means movable in the longitudinal direction of the image bearing  
10 member is enhanced. Even in the case that the developer charging means is moved, it is possible to suppress adhesion of developer to a charger so as to avoid formation of abnormal images due to charging error. In addition, according to the present invention, it is possible to suppress the accumulation of developer on the image bearing member so as to avoid toner scattering, even when the developer charging means is moved.

## 5 ABSTRACT OF THE DISCLOSURE

A process cartridge ~~adapted to be detachably attached to a body of an image forming~~  
~~apparatus comprises~~ includes an image bearing member, a developing device means for  
 developing an electrostatic image ~~formed on the image-bearing member by using developer to~~  
 form a developer image on the ~~image-bearing member and a developer charger charging means~~  
 10 ~~for charging residual developer on the image-bearing member disposed downstream of a~~  
 transferring position at which ~~said the~~ developer image is transferred onto a transfer destination  
 member and upstream of a position at which the electrostatic image is formed on ~~said image~~  
~~bearing the~~ member with respect to the moving direction of ~~said image-bearing the~~ member. The  
 developer charger charging means ~~can be~~ is in contact with the ~~image-bearing~~ member and is  
 15 ~~movable in a direction substantially the same as a the~~ longitudinal direction of the ~~image-bearing~~  
 member upon charging the residual developer.  $L1 + d \leq L2$  when ~~letting~~ L1 (mm) be is the  
 developing width of the developing device means, ~~letting~~ L2 (mm) be is the contact width of the  
 developer charger charging means with the ~~image-bearing~~ member, and ~~letting~~ d (mm) be a is the  
 width of movement of the developer charger charging means, ~~in the direction substantially the~~  
 20 ~~same as the longitudinal direction of the image-bearing member, the condition~~  $L1 + d \leq L2$  is  
satisfied.